

# Vented Gas Logs



VWF 36" Massive Oak Vented Gas Log

## VDY DUZY and VWF WILD FLAME Vented Gas Logs

The **VENTED GAS LOGS**  
*That Heat*

Monessen offers the largest variety of radiant heat producing vented logs in the industry. All Monessen vented gas logs feature innovative, artistically crafted log designs and burner styles that produce dancing yellow flames, glowing embers and warm comfortable radiant heat, up to 22,000 Btu. Monessen also features a limited lifetime warranty on all vented fiber ceramic and refractory logs.

*Heat with  
Personality.*

**MONESSEN**  
HEARTH SYSTEMS

# VWF WILD FL

## CLASSIC SERIES

Up to 22,000 Btu  
of Radiant Heat

The **Wild Flame Logs** offers the ultimate in a big flame presentation. Massive logs, wild yellow flames and a brilliant embered bring the realism of a roaring fire into your home.



**American Oak**



**Massive Oak**

### CSA Design Certified or RADCO Models Available In All Styles

- Six log styles - Massive Oak, Split Pine, Split River Oak, American Oak, Weathered Pine and White Birch (24" only)
- Innovative and artistically crafted lightweight refractory or ceramic fiber logs with natural yellow flames.
- Built-in embered stainless steel burner maximizes glowing embers and accent flames under logs.
- Four log sizes - 18", 24", 30" and 36" (Split River Oak, Weathered Pine and Massive Oak Styles Only).

# VDY DUZY VEN

## DUZY SERIES

The **Duzy™ Series** is a technological breakthrough in vented gas log design. With the Duzy patented "Natural Flame™" STAINLESS STEEL burner system, it will provide up to 17,000 Btu of heat into your room at a cost of up to 35% less than standard vented log systems.

Up to 17,000 Btu  
of Radiant Heat

- **Lifetime Warranty** on stainless steel burner base and logs.
- Four log styles - Duzy 2, Duzy 3, Duzy 4 and Duzy 5 (24" and 30" log sizes).
- Three control types - Manual with safety pilot, Millivolt with safety pilot and VariTap Hi/Lo with safety pilot.
- Patented "Natural Flame™" STAINLESS STEEL burner system with outstanding flame realism.
- Clean burning design for both natural and LP gas.
- All components including the burner, grate and control are factory assembled, leak tested for reliability and ease of installation.
- Engineered design prevents heat stress to controls.
- Unique 24/18" design fits the contour and shape of even the most narrow back manufactured wood burning fireplaces.
- Matchless piezo ignition for quick easy lighting.
- UPS shippable.

# FLAME VENTED



***Split Pine***



***White Birch***



***Massive Oak  
See-Thru***

- RADCO models have optional Manual Pilot Safety, Millivolt or Remote Controlled Hi/Lo flame operation (Remote control sold separately).
- CSA design certified models are factory assembled, leak tested for reliability and ease of installation with pilot safety, Millivolt or Remote Controlled Hi/Lo flame operation.
- UPS Shippable.

# VENTED GAS LOGS

## Duzy Series CSA Design Certified



***Duzy 2  
Fiber Ceramic***



***Duzy 3  
Refractory***



***Duzy 4  
Fiber Ceramic***

# GAS LOGS


## COLOSSAL SERIES

NEW

Weathered Pine and Split River Oak styles include **oversized logs** that fit the smaller burners that hide controls. This creates a draping log effect for a fuller and more realistic log look.



*Weathered Pine*

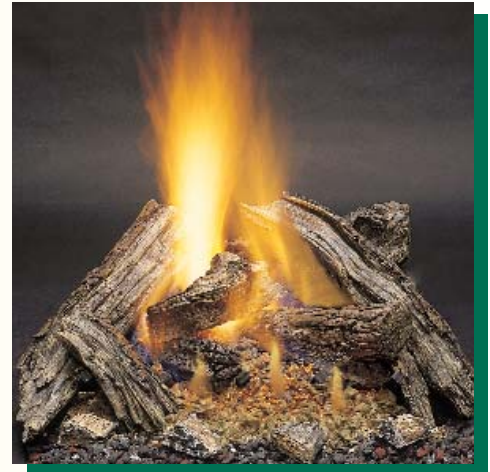

*Split River Oak*

### *Wild Flame Burner Assembly*

The **Wild Flame** STAINLESS STEEL u-shaped burner system features a tilted pan with a tapered shape from front to back to fit the smaller fireplaces and a 5/8" grate. The burner offers a built-in embered burner to maximize the glowing embers and accent flames under the logs.



*CSA Burner System*



*RADCO Burner System*

S

NEW



### *DUZY Natural Flame™ Burner Assembly*

The **Duzy™** patented "Natural Flame™" STAINLESS STEEL burner system features hidden controls, attached grates and piezo ignition. The burner does not take sand or vermiculite like most conventional logs, which creates a clean burn and realistic flame.




# SPECIFICATIONS

Product Specifications																
Model CSA	Log Size	Fuel Type	Manual Control				Manual SPK Control				Millivolt and Hi/Lo Control				BTU/H	Radiant Heat Output
			Minimum Hearth Area				Minimum Hearth Area				Minimum Hearth Area					
			A	B	C	D	A	B	C	D	A	B	C	D		
VWF18	18"	NG	-	-	-	-	24"	13"	21"	16"	28"	13-1/2"	25"	16"	60,000	14,000
VWF18	18"	LP	-	-	-	-	24"	13"	21"	16"	28"	13-1/2"	25"	16"	60,000	14,000
VWF24	24"	NG	-	-	-	-	30"	13"	27"	16"	34"	13-1/2"	31"	16"	70,000	16,000
VWF24	24"	LP	-	-	-	-	30"	13"	27"	16"	34"	13-1/2"	31"	16"	60,000	14,000
VWF30	30"	NG	-	-	-	-	36"	13"	33"	16"	40"	13-1/2"	37"	16"	80,000	18,000
VWF30	30"	LP	-	-	-	-	36"	13"	33"	16"	40"	13-1/2"	37"	16"	60,000	14,000
VWF36	36"	NG	-	-	-	-	42"	13"	39"	16"	46"	13-1/2"	41"	16"	90,000	22,000
VWF36	36"	LP	-	-	-	-	42"	13"	39"	16"	46"	13-1/2"	41"	16"	60,000	14,000
VWF18ST	18"	NG	-	-	-	-	-	-	-	-	28"	16"	28"	16"	60,000	14,000
VWF18ST	18"	LP	-	-	-	-	-	-	-	-	28"	16"	28"	16"	60,000	14,000
VWF24ST	24"	NG	-	-	-	-	-	-	-	-	34"	16"	34"	16"	70,000	16,000
VWF24ST	24"	LP	-	-	-	-	-	-	-	-	34"	16"	34"	16"	60,000	14,000
RADCO																
VWF18	18"	NG	20"	13"	19"	16"	24"	13"	21"	16"	28"	13-1/2"	25"	16"	80,000	18,000
VWF18	18"	LP	20"	13"	19"	16"	24"	13"	21"	16"	28"	13-1/2"	25"	16"	60,000	14,000
VWF24	24"	NG	26"	13"	25"	16"	30"	13"	27"	16"	34"	13-1/2"	31"	16"	90,000	20,000
VWF24	24"	LP	26"	13"	25"	16"	30"	13"	27"	16"	34"	13-1/2"	31"	16"	60,000	14,000
VWF30	30"	NG	32"	13"	31"	16"	36"	13"	33"	16"	40"	13-1/2"	37"	16"	90,000	22,000
VWF30	30"	LP	32"	13"	31"	16"	36"	13"	33"	16"	40"	13-1/2"	37"	16"	60,000	14,000
VWF36	36"	NG	38"	13"	37"	16"	42"	13"	39"	16"	46"	13-1/2"	41"	16"	90,000	22,000
VWF36	36"	LP	38"	13"	37"	16"	42"	13"	39"	16"	46"	13-1/2"	41"	16"	60,000	14,000
VWF18ST	18"	NG	20"	13"	20"	16"	24"	13"	24"	16"	28"	16"	28"	16"	80,000	18,000
VWF18ST	18"	LP	20"	13"	20"	16"	24"	13"	24"	16"	28"	16"	28"	16"	60,000	14,000
VWF24ST	24"	NG	26"	13"	26"	16"	30"	13"	30"	16"	34"	16"	34"	16"	90,000	20,000
VWF24ST	24"	LP	26"	13"	26"	16"	30"	13"	30"	16"	34"	16"	34"	16"	60,000	14,000

**NOTE:** When using Colossal Series logs, use the burner specifications for the next size up. (Example: 24/18SRO log fits 18" burner. Use 24" specifications for minimum hearth area to choose the correct log size for your fireplace opening.)

Product Specifications													
Model	Log Size	Fuel Type	Manual Control				Millivolt and Hi/Lo Control				BTU/H	Radiant Heat Output	
			Minimum Hearth Area				Minimum Hearth Area						
			A	B	C	D	A	B	C	D			
VDY24/18D2/D3/D4/D5	24"	NG	26"	13-1/2"	17"	16"	26"	13-1/2"	18"	16"	50,000	15,000	
VDY24/18D2/D3/D4/D5	24"	LP	26"	13-1/2"	17"	16"	26"	13-1/2"	18"	16"	50,000	15,000	
VDY30D2/D3/D4/D5	30"	NG	32"	13-1/2"	23"	16"	32"	13-1/2"	24"	16"	65,000	17,000	
VDY30D2/D3/D4/D5	30"	LP	32"	13-1/2"	23"	16"	32"	13-1/2"	24"	16"	65,000	17,000	

## Minimum Hearth Drawing



# OPTIONAL ACCESSORIES

## For Remote Control Models



On/Off Remote Controls with Receiver for millivolt use.



On/Off Remote Controls with LCD Display with Receiver for millivolt use.



Concentric VariTap Hi/Lo Remote Control with Battery Receiver.



Touch Light™ Table Top/Wall Mount On/Off Remote Control with Receiver for millivolt use.



Wireless Wall Switch/Timer with Receiver for millivolt use.

## How to Choose A Gas Log Set For Your Fireplace

1 Take the following measurements of your fireplace:

A Front Width \_\_\_\_\_ inches

B Depth \_\_\_\_\_ inches

C Back Width \_\_\_\_\_ inches

D Height \_\_\_\_\_ inches

2 Identify Gas Type:  Natural  L.P.

3 Select a log set that fits within the minimum hearth area requirements using the chart above.

4 Provide this information to your dealer.

## MONESSEN HEARTH SYSTEMS

149 Cleveland Drive • Paris, Kentucky 40361

[www.monessenhearth.com](http://www.monessenhearth.com)

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.

© 2004 Monessen Hearth Systems, Inc.




VentedLogs-MHS3905


## Valve Kits for VWF Wild Flame Series Only



Manual Valve Kit

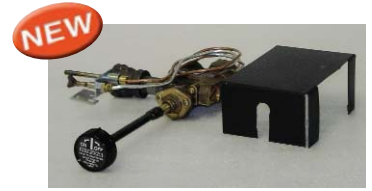

Safety Pilot Kit



Millivolt Valve Kit



Maxitrol Hi/Lo Valve Kit



Concentric VariTap Hi/Lo Valve Kit

## Accessories



Fiber Ceramic Log Remote Receiver Cover



Fiber Ceramic Manual Valve Cover



Fiber Ceramic Millivolt Valve Cover



Ember Remote Receiver Cover.



Metal Insulated Remote Receiver Cover



Decorative Fiber Ember Kit



Cinders

## REGULATORY APPROVAL

Monessen vented gas logs are certified as decorative appliances to the ANSI Z21.60 standard. In independent laboratory testing conducted by a major research university, testing documented the radiant heat output of Monessen's vented logs utilizing advanced log and burner technology.

### Warning:

- Do not operate with glass doors closed, this may cause excessive heat damage to components.
- Sunken fireplaces or fireplaces fitted with devices that restrict airflow may result in operational problems.
- The damper stop provided with this unit must be installed to prevent full closure of the fireplace damper.
- It is recommended that a fireplace screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for the passage of combustion air into the gas log set.
- Keep small children and animals away from the open flame of the gas log set at all times.
- These gas logs are only to be installed in a solid fuel burning fireplace with a working flue constructed of non-combustible materials.

Sold by: